Clean and accurate professional loyalty

Advocating science and technology Improve quality Perfect service

Address: Dong'ou Industrial Zone,Oubei,
Yongjia,Wenzhou.Zhejiang
Tel: 0577-67966258 **Fax:** 0577-56994533
Website: http://www.borrapump.com

BORRA PUMP & VALVE
MANUFACTURE CO., LTD

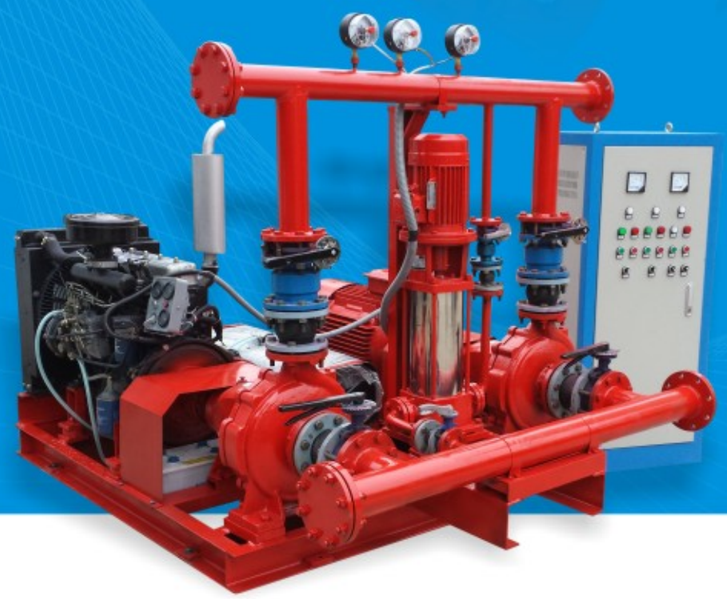

CONTENTS

01 Fire Pump & Fire Pump Package

02 Diesel Fire Pump End Suction Type XBC-IS

02 Diesel Fire Pump Multistage Type XBC-D

03 Diesel Fire Pump Split Case Type XBC-SOW

03 Electric Fire Pump Horizontal End Suction Type XBD-IS

04 Electric Fire Pump Vertical End Suction Type XBD-L

04 Electric Fire Pump Multistage Type XBD-D

05 Electric Fire Pump Split Case Fire Type XBD-SOW

05 Jockey Pump Vertical Type XBD-I

06/10 Fire Fighting Pump Package XB-E.D.J

11 Fire Foam System FFS

12 Booster Regulator Water Supply Equipment BRS

13 Flood Control Pump/Irrigation Pump

14 Diesel Engine Big Flow Pump CHWY

14 Diesel Engine Big Flow Pump CHW

15 Diesel Engine Big Flow Pump CHWD

15 Diesel Engine Self-priming Pump ZBC

16 Diesel Engine Self-priming Pump ZBCT

16 Movable Diesel Engine Pump SPY

17 Mute Diesel Engine Pump MXBC-D

17 Portable Diesel Self-priming Pump LK

18 Other Pumps

18 Self-priming Drain Pump ZW

18 Self-priming Sewage Pump ZX

18 Submerged Sewage Pump QW

18 Deep-well Submerged Pump QJ

18 Magnetic Pump CQB

18 Vertical Multi-stage Centrifugal Pump CDLF

19 Application

20 Service

BL®

BORRA

Enterprise honor

Facility &Equipment

The leap-surmounting for not stopping

◎ Advanced equipment

Fire Pump & Fire Pump Package

Fire Pump

Diesel Fire Pump End Suction Type XBC-IS

Performance Range : (50HZ and 60HZ) According NFPA20

1. Flow : up to 400 m^3/h
2. Head: up to130m
3. Speed: up to 3000rpm
4. Power : up to 150kw
5. Temperature range : Within -10 to 110 Deg C

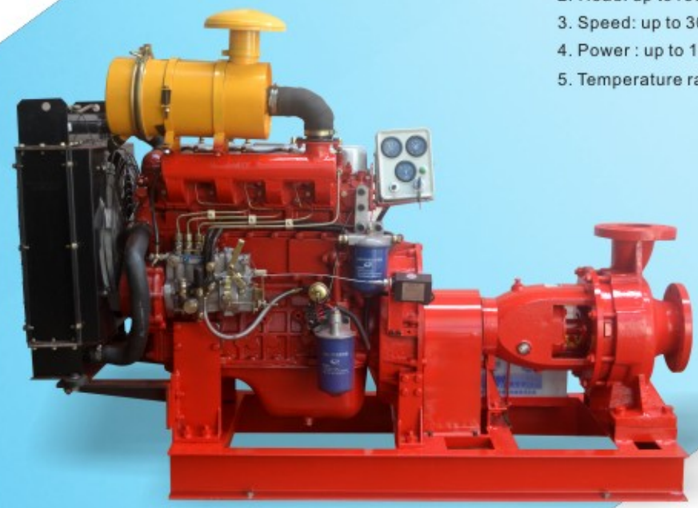

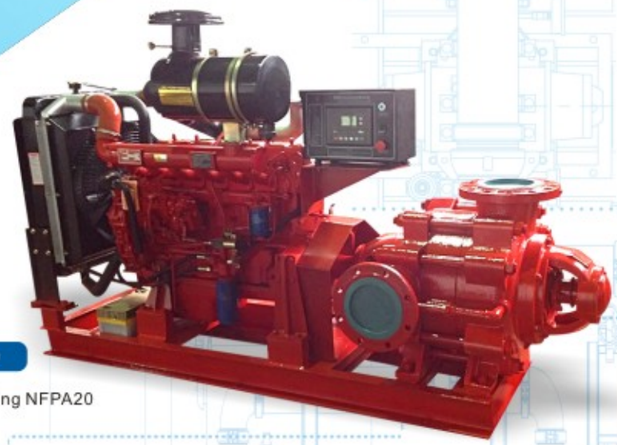

Diesel Fire Pump Multistage Type XBC-D

Performance Range : (50HZ and 60HZ) According NFPA20

1. Flow : up to 600 m^3/h
2. Head: up to500m
3. Speed: up to 3000rpm
4. Power : up to 500kw
5. Temperature range : Within 160 Deg C

Fire Pump

Diesel Fire Pump Split Case Type XBC-SOW

Performance Range : (50HZ and 60HZ) According NFPA20

1. Flow : up to 10000 m^3/h
2. Head: up to180m
3. Speed: up to 3000rpm
4. Power : up to 800kw
5. Temperature Range : Within 200 Deg C

Electric Fire Pump Horizontal End Suction Type XBD-IS

1.Flow: up to 1000 m^3/h
2. Head: up to130m
3.Power: up to 150kw
4.Speed: up to 2900r/min
5.Temperature range：≤105°C.

Fire Pump

Vertical In-Line Fire Pump Type XBD-L

1.Flow: up to 1000 m^3/h
2. Head: up to130m;
3. Power: up to 150kw
4. Speed: up to 2900r/min
5. Temperature range：≤105°C

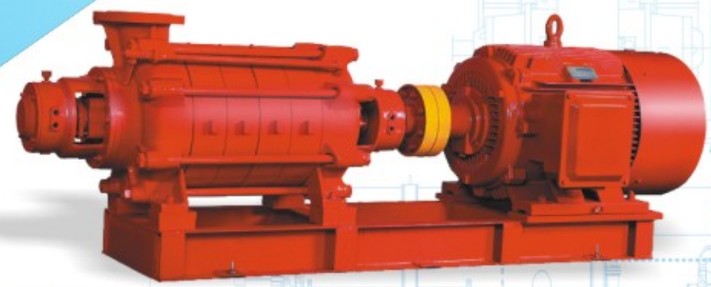

Electric Fire Pump Multistage Type XBD-D

1. Flow : up to 600 m^3/h
2. Head: up to 500m
3. Speed: up to 2900rpm
4. Power : up to 500kw
5.Temperature range : Within 160 Deg C

Fire Pump

Electric Fire Pump Split Case Fire Type XBD-SOW

1. Flow : up to 10000 m^3/h
2. Head: up to 180m
3. Speed: up to 2900rpm
4. Power : up to 800kw
5. Temperature Range : Within 200 Deg C

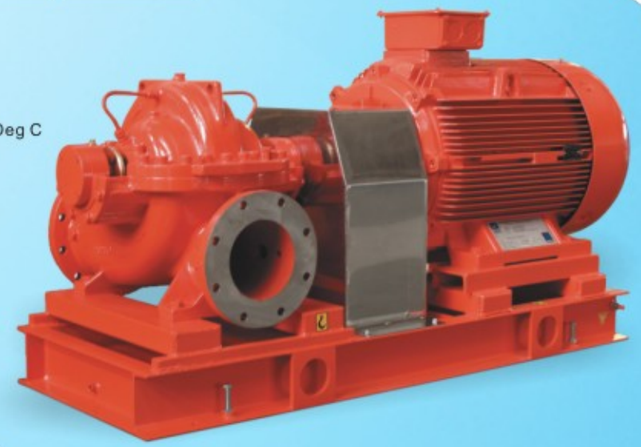

Jockey Pump Vertical Type XBD-I

1.Flow: up to 160 m^3/h
2. Head: up to 200m;
3. Power: up to 132kw
4. Speed: up to 2900r/min
5. Temperature range：≤ 105°C

Fire Pump

Fire Fighting Pump Package XB-E.D.J

Fire Fighting Pump Package XB-E.D.J, IS series, SOW series, D series.

Technical Parameters:

Flow Range: 40-3000m^3/h
Pressure Range: 0.2-2.2MPA
Rotation Speed: 1500r/min~3000 r/min

Work Range:

Ambient Pressure :> 90KPa
Ambient Temperature: 50°C-400°C
Relative Humidity:≤80%

Fire Fighting Pump

Package XB-E.D.J

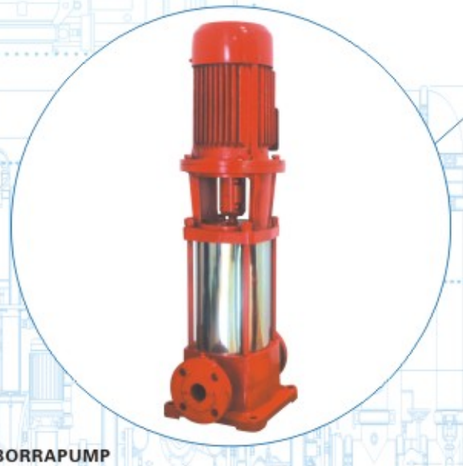

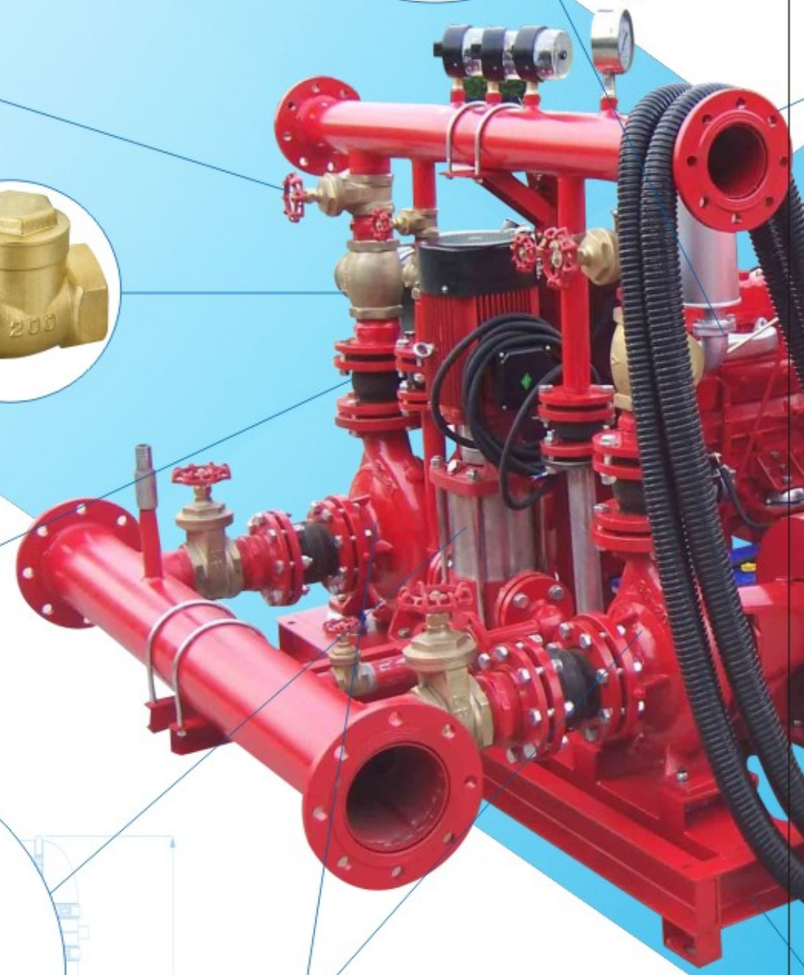

Accumulated bit by bit to

Improve, to perfect the future

Attitude decides everything

details determine

success or failure

Fire Pump Package

Fire Foam System FFS

Fire Foam System, proportioning systems consist of Diesel Fire Pump, Inline Inductor, Water Tank, Foam Tank, Control Cabinet, and Fire Hydrant.

Technical parameters:

Flow range: 40-3000m³/h
Pressure range: 0.2-2.2MPA
Rotation speed: 1500r/min~3000 r/min

Work range:

Ambient pressure : > 90KPa
Ambient temperature: 50°C-400°C
relative humidity: ≤80%

Fire Pump Package

Booster Regulator Water Supply Equipment

Booster Regulator Water Supply Equipment is suitable for multi-story and high-rise building and booster requirements for fire hydrant water supply systems and automatic water spraying fire-extinguishing systems and other fire-fighting and water supply system.

Technical parameters:

Flow Range: ≤360m³/h
Pressure Range: ≤1.6MPa

Flood Control Pump
Irrigation Pump

Flood Control Pump/ Irrigation Pump

Diesel Engine Big Flow Pump CHWY

1.Flow: 70-4000m³/h
2.Head: 4-20m
3.Diameter: 150-650mm

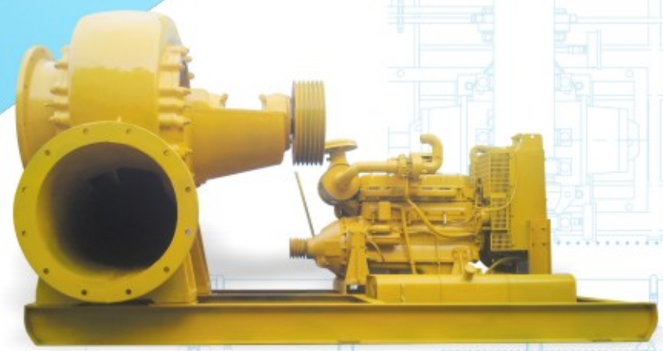

Diesel Engine Big Flow Pump CHW

1.Flow: 70-4000m³/h
2.Head: 4-20m
3.Diameter: 150-650mm

Flood Control Pump/ Irrigation Pump

Diesel Engine Big Flow Pump CHWD

1.Flow: 70-4000m³/h
2.Head: 4-20m
3.Diameter: 150-650mm

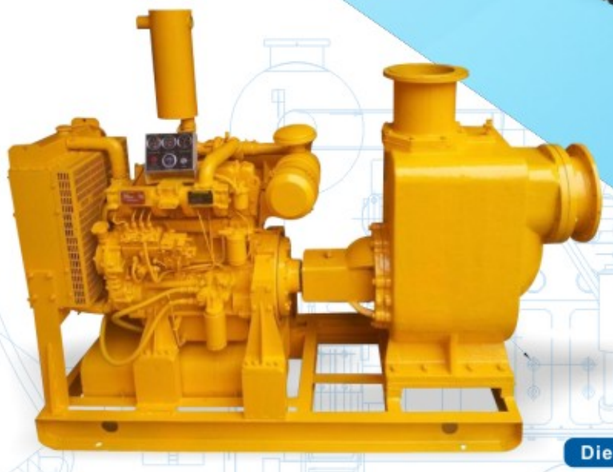

Diesel Engine Self-priming Pump ZBC

1.Flow: 70-1200m³/h
2.Head: 4-30m
3.Diameter: 150-350mm

Flood Control Pump/ Irrigation Pump

Diesel Engine Self-priming Pump ZBCT

1.Flow: 70-1200m³/h
2.Head: 4-30m
3.Diameter: 150-350mm

Movable Diesel Engine Pump SPY

1.Flow: 70-800m³/h
2.Head: 4-35m
3.Diameter: 150-250mm

Flood Control Pump/ Irrigation Pump

Mute Diesel Engine Pump MXBC-D

1.Flow range: 50-3000 m^3/h
2.Head range: 32-600m
3.Noise(7m): 75db

Portable Diesel Self-priming Pump LK

1.Flow: 30-90m^3/h
2.Head: 15-65m
3.Diameter: 40-100mm

Self-priming Sewage Pump ZW

Self-priming Water Pump ZX

Other Pump

Vertical Multi-stage Centrifugal Pump CDLF

Submerged Sewage Pump QW

Magnetic Pump CQB

Deep-well Submerged Pump QJ

APPLICATION

Service